

ASB - ANALOG SOUNDER BASE



Shown without sensor

Shown with sensor

SPECIFICATIONS	
Operating Voltage	17 ~ 41 VDC
SLC Current Consumption	110µA (Typical) 110µA (Alarm)
Auxiliary Supply Voltage	16 ~ 31 VDC
Auxiliary Current Consumption	550µA (Typical) 18mA (Alarm)
Sound Pressure Level at 10ft.	85dB
Max. Quantity Per Loop	127
UL Ambient Installation Temperature Range	32°F (0°C) ~ 100°F (38°C)
Operating Temperature Range	32°F (0°C) ~ 122°F (50°C)
Dimensions (without sensor)	1.34"H x 5.94"D
Weight	0.455 lb
Relative Humidity	93% RH Non-Condensing
Compatible Detectors	ALG-V, ALK-V, AIE-EA, ATG-EA, ACA-V

STANDARD FEATURES

- Programmable evacuation codes - Continuous, March, ANSI Temporal patterns
- Base learns the sensor address and assumes an upper range address (128-254)
- Up to 127 sensors and 127 ASBs can be used on one SLC loop
- Can be alarmed or reset by zone or by individual address
- ASB SLC loop wire resistance = 50 ohms Max. (total SLC wire run length)
- High sound pressure level (85dB SPL at 10 feet)

DESCRIPTION

The ASB Analog Sounder Base is designed for use with Hochiki analog sensors ALG-V, ALK-V, ACA-V, AIE-EA, and ATG-EA. Each addressable base is to be connected to a Hochiki America Corporation DCP Signaling Line Circuit (SLC). The ASB provides an audible alarm in the immediate vicinity. Typical applications are hotels, apartments, and hospitals.

The ASB has a highly configurable programming algorithm that allows the user to set up groups of bases for synchronization of modulation tones. Each device has 16 states that are programmed with the desired output pattern to be used (e.g., "Temporal" or "March") for each state.


PRODUCT LISTINGS

		<p>California State Fire Marshal 7300-0410:161</p>	
---	---	--	---

Specifications subject to change without notice.

Continued on back.

WIRING DIAGRAM

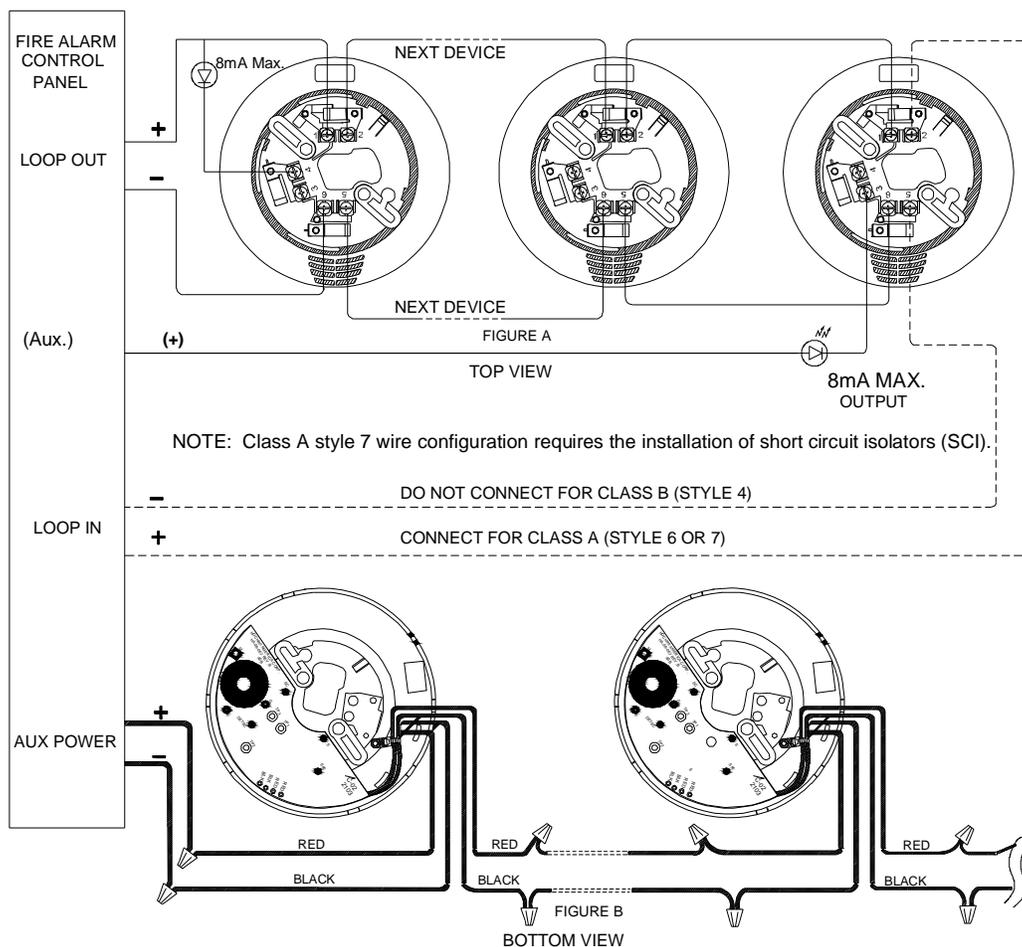

NUMBER OF BASES PERMITTED	
# of Bases In Alarm	Maximum Auxiliary 24VDC Power Wire Resistance (Total Auxiliary Run Length)
127	1.4 ohm
75	2.4 ohm
60	3.0 ohm
50	3.6 ohm
30	6.1 ohm
20	9.1 ohm
15	12.2 ohm
10	18.3 ohm

NOTE: SLC maximum wiring resistance is 50 ohms.